

19



Octrooi Centrum  
Nederland

11

2010323

12 C OCTROOI

21 Aanvraagnummer: **2010323**

22 Aanvraag ingediend: **18.02.2013**

51

Int.Cl.:

**H05B 37/02** (2006.01)

**F21S 8/08** (2006.01)

**G01V 8/20** (2006.01)

43 Aanvraag gepubliceerd:

-

47 Octrooi verleend:  
**21.08.2014**

45 Octrooischrift uitgegeven:  
**27.08.2014**

73

Octrooihouder(s):

**Tvilight B.V. te Groningen.**

72

Uitvinder(s):

**Henri Eskonen te Groningen.**

**Amit Gudadhe te Groningen.**

**Jayakrishnan Harikumaran te Groningen.**

**Chintan Shah te Groningen.**

74

Gemachtigde:

**Ir. A.A.G. Land c.s. te DEN HAAG.**

54 **Motion detector system, lighting system with such system and method for detecting moving vehicles and/or pedestrians.**

57 The invention relates to & motion detector system, a lighting system with such detector system and a method for detecting moving vehicles and/or pedestrians. The motion detector system comprises:  
- a first motion detector for detecting vehicles and/or pedestrians having a speed in a first speed range, the first detector being arranged to detect moving objects in a first detection zone having a first size, the first size determining the first speed range; and  
- a second motion detector for detecting vehicles and/or pedestrians having a speed in a second speed range, the second detector being arranged to detect moving objects in a second detection zone having a second size, the second size determining the second speed range.

NL C 2010323

Dit octrooi is verleend ongeacht het bijgevoegde resultaat van het onderzoek naar de stand van de techniek en schriftelijke opinie. Het octrooischrift komt overeen met de oorspronkelijk ingediende stukken.

MOTION DETECTOR SYSTEM, LIGHTING SYSTEM WITH SUCH SYSTEM AND  
METHOD FOR DETECTING MOVING VEHICLES AND/OR PEDESTRIANS

The invention relates to a motion detector system.  
5 Such systems are able to detect the motion of moving  
objects, such as pedestrians, bicycles and cars. It is known  
in the art to connect a motion detector system to an  
electrical device, such as a lamp, such that the device is  
automatically activated upon detecting motion.

10 In many situations it is desired to detect the  
speed of an object, such as the speed of a pedestrian,  
bicycle or car. Conventional motion detector systems, such  
as radar or a system employing a camera, are able to detect  
the speed of an object by processing signals received from  
15 their detector, e.g. the radar receiver or the camera.  
Therefore, conventional systems require a processor of some  
sort, which has to be programmed for the desired  
application. In general, these algorithms are complex and  
require programming of the system by an expert. This makes  
20 conventional systems complicated and expensive.

An object of the invention is to overcome the  
above disadvantage and to provide a motion detector system  
which can distinguish between objects in different speed  
ranges in an effective and cost efficient manner.

25 This object is achieved by the motion detector  
system according to the invention for detecting moving  
vehicles and/or pedestrians and determining in which one of  
at least two speed ranges the speed of the detected vehicles  
and/or pedestrians falls, the system comprising:

- 30 - a first motion detector for detecting vehicles and/or  
pedestrians having a speed in a first speed range, the  
first detector being arranged to detect moving objects,  
such as vehicles and/or pedestrians, in a first

detection zone having a first size, the first size determining the first speed range; and

- a second motion detector for detecting vehicles and/or pedestrians having a speed in a second speed range, the second detector being arranged to detect moving objects, such as vehicles and/or pedestrians, in a second detection zone having a second size, the second size determining the second speed range.

For example, the vehicles comprise cars, bicycles and motorcycles.

The first and second speed range are different, to be able to distinguish between objects having a speed in a different speed range.

On the basis of detection of motion by the first detector and/or second detector, the system can distinguish between vehicles and/or pedestrians in a first speed range - when the first detector detects motion - and vehicles and/or pedestrians in a second speed range - when the second detector detects motion.

A further advantage of the system according to the invention is that no complex signal processing is required to determine in which speed range a detected object falls. As each detector inherently is configured for detection in a given speed range, the fact that a given detector detects an object immediately gives the speed range of the detected object. Furthermore, the system can be provided with a sensor type which typically does not allow determination of the speed of motion, such as infrared sensors. Although a single such sensor cannot be used to distinguish between objects moving at different speeds, by combining at least two of such sensors in the system according to the invention, the object can be associated with a certain speed

range. Therefore, no complex and expensive sensor types, such as radar or camera, are required.

Moreover, the energy consumption of the system according to the invention is less than conventional systems. No complicated processing is required, so that the energy consumption due to processing components is reduced with respect to conventional systems, such as ultrasonic systems or camera systems. In particular, the invention allows the use of passive sensors, such as infrared sensors, which consume less energy than active sensors, such as ultrasonic sensors. This further reduces the energy consumption.

The size of each of the zones is selected to correspond to the desired speed range. For example, the size of the zones is defined by controlling the field of view, orientation or location of the respective detectors. For example, the detector is placed higher to obtain a detection zone with a larger projected area on the ground.

The size of the zones is preferably measured by the length and/or width of the projection of the zone on the ground.

More than two motion detectors may be provided. In a currently preferred embodiment of the invention, the system comprises three motion detectors, each arranged to detect motion in a respective detection zone corresponding to three different speed ranges.

Preferably, a first speed range corresponds to the speed typical of pedestrians, for example 0-10 km/h, 3-7 km/h or 4-6 km/h. Preferably, a second speed range corresponds to the speed typical of bicycles, for example 10 - 35 km/h, 15-30 km/h or 15-25 km/h. Preferably, a third speed range corresponds to the speed typical of cars, for example at least 30 km/h, at least 40 km/h or at least 50

km/h, such as a speed range of 30-180 km/h, 30-160 km/h, 30-140 km/h, 30-120 km/h, 30-80 km/h, 30-60 km/h or 30-50 km/h.

It is noted that in such a configuration a fast pedestrian may be detected as "an object having a speed typical for bicycles" or a fast bicycle may be detected as "an object having a speed typical for cars". For many applications this suffices, such that an identification of whether the detected object is a car, bicycle or pedestrian is not required.

The speed ranges may comprise only a lower or an upper limit, or both a lower and an upper limit.

There may be overlap in the speed ranges, but preferably the selected speed ranges are distinct, i.e. they do not overlap.

In a preferred embodiment, at least one of the detectors comprises an infrared motion sensor. Preferably, both the first and second detectors comprise an infrared motion sensor. In the case of a system with more than two motion detectors, preferably all detectors comprise an infrared motion sensor.

Infrared motion sensors are also known as PIR (passive infrared) motion sensors or simply PIR sensors. PIR sensors have the advantage that they are passive devices, i.e. they do not emit radiation. Therefore, PIR sensors are energy efficient. A further advantage is that they are relatively low in price as compared to for example radar, image processing or ultrasonic motion sensors. One type of conventional detector system is equipped with a camera for detecting motion. However, cameras can have the drawback of a negative public opinion due to privacy concerns related to surveillance cameras. Furthermore, cameras are relatively expensive and require additional processing.

The output  $V$  of a typical PIR sensor is given by:

$$V \propto \epsilon_{\text{object}} \tau_{\text{atmosphere}} \tau_{\text{lens}} A_{\text{object}} A_{\text{detector}} \Delta W R(\nu) / D^2,$$

wherein

- $\epsilon_{\text{object}}$ : the emissivity of the object, typically 0.95;
- 5 -  $\tau_{\text{atmosphere}}$ : atmospheric transmittance, typically 0.95;
- $\tau_{\text{lens}}$ : lens transmittance, typically 0.6;
- $A_{\text{object}}$ : the area of the object;
- $A_{\text{detector}}$ : the projection area on detector;
- $\Delta W$ : the radiance of the object in the range of
- 10 wavelengths  $\lambda$  detectable by the PIR;
- $R(\nu)$ : frequency response of the sensor, with  $\nu$  denoting frequency; and
- $D$ : distance to object.

The temperature of objects to be detected (humans, cars) is typically 300K – 330K. For this temperature range Planck's law gives a maximum for the radiance  $W(\lambda)$  around a wavelength  $\lambda$  of about 8-13  $\mu\text{m}$ . Therefore, most PIR sensors are sensitive in this wavelength range.

On the basis of Planck's law the radiance of the object in the range 8-13  $\mu\text{m}$  can be calculated to be approximately  $\Delta W \approx 74 \Delta T$ , wherein  $\Delta T$  is the difference in temperature between the object and the environment (note that most PIR sensors are differential sensors, i.e. sensitive to changes in temperature).

25 The quantities  $\epsilon_{\text{object}}$ ,  $\tau_{\text{atmosphere}}$ ,  $\tau_{\text{lens}}$ ,  $A_{\text{object}}$  and  $A_{\text{detector}}$  can be considered constant for a given setup. This gives:

$$V \propto \Delta T R(\nu) / D^2.$$

Therefore, a larger temperature difference will give rise to a larger voltage of the output signal.

Furthermore, as the distance between object and sensor increases, the output voltage of the PIR sensor decreases

according to a square law. For example, a car has a higher temperature than pedestrians or cyclists due to its engine. Therefore, as the distance  $D$  is increased, at some point the output of the sensor will be too low to detect pedestrians or cyclists, but cars will be detected due to their higher temperature with respect to the environment.

Preferably, at least one of the motion detectors is arranged for detecting vehicles comprising an engine, such as a car or a motorcycle, by arranging said at least one detector such that detection zone has a size corresponding to a speed range typical for said vehicles. Examples of such speed ranges include: at least 30 km/h, at least 40 km/h, at least 50 km/h, at least 60 km/h, 30-180 km/h, 30-150 km/h, 30-140 km/h, 30-130 km/h, 30-120 km/h, 30-100 km/h and 30 - 80 km/h, 30-60 km/h and 30-50 km/h. Preferably, the motion detector for detecting vehicles is arranged such that the distance from the detector to the detection zone is such that the output voltage of the PIR is above a predefined first threshold when a vehicle comprising an engine crosses the detection zone and the output voltage of the PIR is below a predefined second threshold when a pedestrian or bicycle crosses the detection zone. The first threshold and second threshold may be different or equal. Therefore, the size of the detection zone and the distance to the motion detector can be selected on the basis of the difference in typical temperature and speed of vehicles with an engine versus objects without an engine, such as pedestrians and bicycles.

Preferably, the infrared motion sensor is of the type that operates in a differential manner. Such PIR sensors comprise at least two sensing elements in a reversed polarity configuration: a negative and a positive sensing element. This divides the field of view of the motion sensor

into a number of zones corresponding to the number of sensing elements. For example, a common type of PIR sensor comprises two adjoining sensing elements, thereby defining a positive zone A and a negative zone B (see figures 10A and 10C). The output of the sensor depends on the relative change in the infrared radiation from these two zones. An increase of IR radiation in the positive zone A will lead to an increase of the sensor output, whereas an increase of the IR radiation in the negative zone B will lead to a decrease of the sensor output. When an object passes the IR motion sensor, it passes both zones, leading to a bipolar signal. This will be illustrated further with reference to figure 10. If the object passes from the positive zone A to the negative zone B, as in figure 10A, the sensor output will be a signal starting from the baseline to a positive value, then returning to the baseline as the object moves towards the boundary between the positive and negative zone, then taking a negative value as the object is in the negative zone and returning to baseline again when the object moves out of the negative zone and out of the field of view of the sensor, as in figure 10B. If an object passes from zone B to A, as in figure 10C, the signal appears similar to figure 10D.

Preferably the infrared motion sensors are provided with a lens, such as a Fresnel lens, or a mirror, such as a focussing mirror. This enables adjusting the field of view of the sensor. Preferably, a lens is provided, as lenses are less prone to getting dirty, e.g. due to dust, and are easier to clean than mirrors.

In a preferred embodiment, at least one of the detectors comprises a lens or mirror arranged such that the respective detection zone is divided into at least two subzones.



For example, a lens or mirror having multiple optical axes is provided. Such a lens / mirror is also known as a multi-zone lens / mirror. In another example, multiple lenses or mirrors are provided.

5           A conventional lens or mirror has a single optical axis. Therefore, such a lens or mirror will project a single image on the infrared sensor. The image is divided by the PIR sensor into a positive zone and a negative zone. On the other hand, when using multiple lenses or mirrors, or a lens  
10 or mirror having multiple optical axes, multiple images are projected on the infrared sensor. In other words, the detection zone is effectively divided into a number of subzones, and each of the subzones is projected by the lens or mirror on the PIR sensor. The images of these subzones  
15 are overlapping each other on the sensor. Therefore, the sensor divides each of these subzones into a positive and negative zone. So effectively, instead of having a single positive and a single negative zone, the detection zone is divided into a number of positive and negative zones. This  
20 can increase the detection efficiency.

Preferably, the lens or mirror is arranged to divide the respective detection zone into four subzones.

Increasing the number of subzones will increase the detection efficiency, but only up to a certain point. If  
25 too many subzones are created, the subzones will become too small to effectively detect moving objects. In practice, the inventors found four to be an advantageous number of subzones for street lighting applications, e.g. for  
detection zones having a width and length of about 2-10 m,  
30 for example 3 or 4 m. Preferably, the subzones are arranged in two rows of two.

A lens or mirror which divides the detection zone into four subzones is particularly advantageous in the case

of an infrared motion sensor having two sensing elements in a reversed polarity configuration as described above.

Alternatively, an infrared motion sensor comprising more than two sensing elements, i.e. having a field of view

5 divided into multiple negative and positive regions, can be used. For example, the infrared motion sensor comprises four sensing elements with two negative and two positive regions, e.g. arranged in a chessboard configuration. Preferably, the number of subzones  $n_{lens}$  into which the lens or mirror divides  
10 the detection zone is chosen taking into account the number of sensing elements  $n_{sensor}$ . Preferably,  $n_{lens} * n_{sensor}$  is selected to be equal to 4, 6, 8 or 12.

In a preferred embodiment, the first and second motion detector each comprise an infrared motion sensor  
15 having at least two sensing elements in a reversed polarity configuration thereby dividing the respective detection zone into at least one negative part and at least one positive part, the second motion detector being rotated with respect to the first motion detector

20 - about a substantially vertical axis to obtain a different location for the second detection zone than for the first detection zone; and  
- about a second axis to at least partially compensate for rotation of the at least one negative part with  
25 respect to the at least one positive part of the second detection zone as compared to the first detection zone due to said rotation about the substantially vertical axis.

For example, the first motion detector is arranged  
30 in a first orientation in which the boundary between the at least one negative part and the at least one positive part of the first detection zone is directed in a first direction. The second motion detector is rotated about the

second axis - being different from the substantially vertical axis - such that the boundary between the at least one negative part and the least one positive part of the second detection zone is directed in substantially the same direction as the first direction.

The location of the detection zones can be adjusted by rotating and/or tilting the respective motion detector. However, when using a differential PIR sensor, rotation of the sensor about a vertical axis will also rotate the respective negative and positive parts of the corresponding detection zone with respect to each other. Although the effect of this rotation on detection is relatively small at small angles, i.e. 1-5 degrees, rotation may negatively influence the detection efficiency at larger angles, i.e. angles equal or greater than 30 degrees, preferably equal or greater than 40 degrees, most preferably equal or greater than 45 degrees. For example, when monitoring a road, the negative and positive parts of the detection zone have to be orientated such that a vehicle or pedestrian travelling along the road first passes one of the negative or positive parts and subsequently the other. Rotation of the detector to adjust the location of the detection zone results in a change in the orientation of the negative and positive parts of the detection zone, which can result in incorrect alignment with respect to the road. This reduces the detector efficiency. The described embodiment of the invention solves this problem by compensating for the rotation about the vertical axis by rotation about a second axis, being different from the vertical axis. For example, the second axis is substantially perpendicular to the vertical axis. Preferably, the second axis is an axis substantially perpendicular to the sensing area of the sensor, i.e. an axis normal to the sensing area of the

sensor, and/or substantially perpendicular to any lens / mirror, i.e. an axis normal to the lens / mirror. For example, the sensor and/or lens / mirror are rotated by 90 degrees about this axis.

5           In an application of the detector system along a road, the above has the advantage that the second motion detector can be configured to effectively detect objects along the road as far as 10-50 m away from the detector. Furthermore, the same sensor and/or lens can be used for the  
10 second motion detector as for the first motion detector. Using the same sensor and/or lens, different detection zones can be defined, wherein the locations of the negative and positive parts of the detection zone with respect to each other are controlled by rotation of the sensor about the  
15 second axis.

          In a preferred embodiment, the system comprises at least two motion detectors for detecting vehicles and/or pedestrians having a speed in substantially the same speed range, being arranged to detect moving objects, such as  
20 vehicles and/or pedestrians, in respective detection zones having substantially the same size, said same size determining said same speed range, wherein the detection zones of said at least two motion detectors are provided at a distance from each other.

25           In other words, the system according to this embodiment comprises at least two motion detectors which each define a detection zone for detecting objects within the same speed range A and at least one further motion detector defining a detection zone for detecting object  
30 within a different speed range B. Preferably, two detectors are provided for each speed range, i.e. two detectors for speed range A and two detectors for speed range B.

By providing two detectors for each speed range, the detection efficiency is increased. For example, the detector system can be adapted to only output a signal indicating the speed range of a detected object if all  
5 detectors arranged for that speed range have detected an object within a predefined time interval. The time interval should be related to the distance between the respective zones and the common speed range.

Preferably, the at least two motion detectors  
10 configured to detect objects within the same speed range define detection zones which are non-overlapping or partly overlapping. For example, the detection zone of the first detector covers a part of the road to the left of the part of the road covered by the detection zone of the second  
15 detector.

In a further preferred embodiment, the system further comprises a processing component connected to said at least two motion detectors adapted to determine the direction of a detected object on the basis of the order of  
20 detection by said at least two motion detectors.

For example, two detectors (A and B) are provided to detect objects in the speed range 5-15 km/h. Detector A has a detection zone to the left of the detection zone of detector B. If within a predefined interval first detector A  
25 and then detector B detects motion, the system outputs that motion was detected in a speed range of 5-15 km/h from left to right. If within a predefined interval first detector B and subsequently detector A detects motion, the system outputs that motion was detected in a speed range of 5-15  
30 km/h from right to left.

Therefore, even if the motion detectors used in the system are not capable of detecting the direction of

motion per se, the system is able to detect the direction of motion.

Preferably, the system comprises an output component for outputting a signal indicating the first  
5 and/or the second speed range.

In a preferred embodiment, the output component is configured to output a signal indicating one of:

- the speed range comprising the lowest speed; and
- the speed range comprising the highest speed,

10 when the first motion detector and the second motion detector both detect an object.

In cases where the speed ranges of the first and second detection zones overlap, both the first and second detector can detect the same object at the same time. In  
15 this embodiment, the output of the system in such a case is either the speed range comprising the lowest speed or the speed range comprising the highest speed. The speed range comprising the lowest / highest speed can be defined as the speed range having the lowest lower limit / highest upper  
20 limit. In one example, the speed range comprising the lowest speed is selected as output. For example, if the first speed range is 2 - 8 km/h and the second speed range is 5 - 18 km/h, if both detectors detect an object within a predefined time interval, the system outputs a signal corresponding to  
25 the first speed range, i.e. the interval 2 - 8 km/h. Effectively, the output of the system then corresponds to the speed ranges 2 - 8 km/h and 8 - 18 km/h, i.e. the lower limit of the second speed range is redefined by the operation of the output component. In a currently preferred  
30 embodiment, the speed range comprising the highest speed is selected as output. In many situations, selecting the highest speed is preferable due to safety considerations. For example, using the same speed ranges as before, if

within a predefined interval both detectors have detected an object, the output corresponds to the second speed range, i.e. the interval 5 - 18 km/h, as this speed range includes the highest upper limit.

5           In a preferred embodiment, the system comprises an accelerometer, wherein the system is arranged to compensate output of the first and second detector for movement of the system detected by the accelerometer.

10           One of the envisaged applications of the system of the invention is to provide it on a lamppost of a streetlight, for controlling the streetlight on the basis of the detected motion. However, streetlight lampposts are known to move in the wind. This motion can be detected by the motion detectors in the system, which will lead to false  
15           triggers. For example, a hot car is parked in the field of view of a PIR sensor. For example, the parked car is running stationary or has just been used such that it is still warm. Due to the movement of the detector system, the hot car may pass through the field of view of the PIR sensor, resulting  
20           in a false motion detection.

          By providing an accelerometer, the system is able to compensate for this own motion, adjusting its output based on the detected acceleration.

25           For example, when using PIR motion sensors, the frequency of detection is registered. The accelerometer registers the frequency of motion of the detector system itself. If the frequency of detection is substantially equal to the frequency registered by the accelerometer, the detection of motion at that frequency is ignored.

30           The detector system according to the invention is preferably applied in an application for controlling lights, such as street lighting, indoor lighting and lighting in parking lots / garages.

The invention further relates to a lighting system, the lighting system comprising

- the motion detector system as described above;
- at least one light source; and
- 5 - a controller which is actively connected to the motion detector system and to the at least one light source for controlling the at least one light source on the basis of the detection of a moving object, such as a vehicle and/or pedestrian, by the motion detector
- 10 system.

The same advantages and effects as described above for the motion detector system according to the invention apply to the lighting system according to the invention. Furthermore, features of both systems can be combined as

15 desired.

For example, the lighting system defines "occupancy = no" and "occupancy = yes" levels for the light source, e.g. 40% and 90% respectively. When "occupancy = no" the lights will be at the low level, and when a presence is

20 detected ("occupancy= yes") the light level will increase to the high level.

Preferably, the controller is arranged to control the light source based on the speed range in which the detected object is classified.

25 As the motion detector system can determine in which one of at least two speed ranges the speed of the detected vehicles and/or pedestrians falls, the controller can adjust the illumination level of the light source depending on this determination.

30 For example, the detection system is provided with three motion detectors, such that the system can distinguish between three speed ranges. The three speed ranges



correspond to the typical speed of pedestrians, bicycles and cars, as described earlier.

Preferably, the lighting system comprises a number of lighting nodes forming a multi-node network, wherein each lighting node comprises:

- a light source;
- a controller connected to the light source; and communication means connected to the controller for communication between the lighting nodes, wherein at least one of the lighting nodes comprises a motion detector system. Lighting nodes comprising a motion detector system will, in the following text, be referred to as detector nodes.

In such a lighting node network, lighting nodes can communicate with each other to establish a lighting pattern upon the detection of a moving object by one or more of the detector nodes. Preferably, the controller of the detector node is adapted to send a control signal to at least one other lighting node in the network upon detection of an object. Thereby, multiple light sources can be controlled on the basis of the detection by the detection node. Preferably, the controller of the detector node is adapted to send a control signal to at least one of the other lighting nodes on the basis of the detected speed range.

The lighting system according to the invention enables creating a lighting pattern with the lighting nodes depending on the speed and/or direction of motion.

For example, when a detector node detects motion, it controls its light source to illuminate with an intensity of 100%. Subsequently, it sends a control signal to other lightning nodes according to a predefined relationship, for

example according to its direct neighbors on a predefined path.

In the context of the application, a direct or first order neighbor of a first node is a second node which is next to the first node on a predefined path. The second order neighbor of a first node is a second node on a predefined path which is separated from the first node by exactly one other node. Generally, an  $n$ -th order neighbor of a first node is a second node which is separated from the first node by exactly  $(n-1)$  other nodes along a predefined path.

Returning to the example: upon receipt of the control signal generated by the detector nodes, the direct neighbors control their light sources to burn at a light level of 90%. The light level is preferably defined in the control signal sent by the detector node. Preferably, the detector node also sends a message to second order neighbors, such that their lights will burn at for example 70%. In this way, a person passing the light sources along a predefined path will be surrounded by an "envelope" of lighting.

The controller may directly control neighboring light sources, e.g. via an electrical connection, or may indirectly control neighboring light sources by communicating with a neighboring lighting system as described above, e.g. via wireless communication.

The number of light sources activated in response to the detection of an object can be made dependent on the speed of the moving object. A faster moving object will require a larger light envelope than a slower moving object. The controller of the lighting system of the invention is preferably adapted to control the light sources such that a

predefined envelope corresponding to the speed range determined by the motion detector system is applied.

It is noted that an overlap in speed ranges is possible. For example, a first speed range is 5-15 km/h and  
5 a second speed range is 10-30 km/h. In that case, preferably the system determines the object to be in the speed range comprising the highest speed. Alternatively, the speed range comprising the lowest speed can be selected by the system.

In a preferred embodiment, the lighting system  
10 further comprises a second motion detector system as described above, being connected to the first motion detector system, wherein the first motion detector system comprises the controller, the controller being arranged to control the light source based on the detection by both  
15 detector systems.

The first motion detector system acts as a master device, whereas the second system acts as a slave device. The master device comprises the controller which controls the at least one light source. The slave device is used for  
20 detection purposes only and sends its output to the master device. The master device can then control the light source taking into account the output of both detector systems. This enables a larger detection area to be covered by the lighting system, as objects in the field of view of both  
25 motion detection systems are taken into account. Typically, the field of view of the motion detection systems can be about 180 degrees or less. By providing two motion detection systems, 360 degree coverage can be obtained.

In another embodiment, the master and slave are  
30 integrated into a single casing which is mountable around a pole.

In a preferred embodiment, the lighting system comprises a casing, the casing comprising a mounting part

for mounting the casing to a lamppost and a detachable part which is detachably connected to the mounting part, the mounting part comprising an electronic circuit for connection to the light source and electrical connection means for disconnectably connecting to further electronics, wherein the electronic circuit is configured such that the voltage over the connection means is below 30 V, preferably below 20 V, more preferably below 15 V.

In certain applications the lighting system according to the invention has to control a light source by using relatively high voltage levels, e.g. at least 50V, at least 100V or at least 120V. This poses a safety risk for personnel performing maintenance to the lighting system. The invention provides an electronic circuit in the mounting part which is configured to operate at these high voltage levels. Further electronics of the system, such as the motion detector system or part of the controller, can connect with this electronic circuit and operate at relatively low voltages. For example, the additional electronics, such as the motion detector system, is housed in the detachable part of the casing.

The invention further relates to a method for detecting moving vehicles and/or pedestrians and determining in which one of at least two speed ranges the speed of the detected vehicles and/or pedestrians falls, the method comprising:

- detecting vehicles and/or pedestrians having a speed in a first speed range, using a first motion detector being arranged to detect moving objects, such as vehicles and/or pedestrians, in a first detection zone having a first size, the first size determining the first speed range; and

- detecting vehicles and/or pedestrians having a speed in a second speed range, using a second motion detector being arranged to detect moving objects, such as vehicles and/or pedestrians, in a second detection zone having a second size, the second size determining the second speed range.

The same advantages and effects as described above for the motion detector system and lighting system apply to the method according to the invention. Furthermore, features of the method and the two systems can be combined as desired.

Further details, advantages and effects will be elucidated on the basis of preferred embodiment, wherein reference is made to the accompanying figures.

Figure 1 shows a front view of an embodiment of the motion detector system according to the invention;

Figures 2A-B show a perspective view (2A) and a top view (2B) of the motion detector system of figure 1 attached to a pole;

Figures 3A-B show a perspective view (3A) and a top view (3B) of an embodiment of a lighting system according to the invention with a master/slave configuration;

Figure 4 shows a disassembled motion detector system according to figure 1;

Figure 5 shows a front view of one of the lenses of the motion detector system of figure 1;

Figure 6-9 show schematic top views of the detection zones and detection subzones of the motion detector system of figure 1; and

Figures 10A-D illustrate the working of a PIR sensor having two sensing elements with reversed polarities.

Motion detector system 2 (figure 1) comprises a casing 4 in which lenses 6a, 6b, 8a, 8b and 10a, 10b are provided. Each lens is provided in front of a PIR motion sensor (not shown). Lenses 6a, 6b are oriented with an angle of 10-30 degrees with respect to the vertical plane, i.e. the optical axes of lenses 6a, 6b show an angle of 10-30 degrees with respect to the horizontal plane. For lenses 8a, 8b this angle is 20-45 degrees, and for lenses 10a, 10b this angle is 30-60 degrees.

Motion detector system 2 (figure 2A-B) is attached by straps 12 to a pole 14 of a street lighting. The pole 14 is located near to street 16 to light up the street. The field of view 18 of detector system 2 is schematically illustrated in this figure. The detection zones will be illustrated in more details below with reference to figures 6-9.

In an embodiment of a lighting system (figure 3A-B) according to the invention, motion detector system 2 acts a master. On the other side of pole 14 a second motion detector system 2' is attached. This second motion detector system detects motion on the second street 16' on the other side of pole 14. The field of view 18' of system 2' has been schematically illustrated. In this embodiment, system 2 comprises a controller for controlling the street light attached to pole 14. System 2' does not comprise a controller, but communicates the output of its detection to system 2, for example via an electrical connection. System 2 controls the lighting on the basis of the detection signals of both systems 2, 2'.

The casing 4 comprises two parts (figure 4). A base part (left part in figure 4) is attached to the pole and comprises power circuit board 20. Controlling the light source is performed by circuit board 20. The removable part

(right part in figure 4) houses the integrated electronics for operating the detectors. Via an electrical connection, the electronics of the removable part can communicate with the base part to control the lighting. With this

5 configuration, the removable part only deals with relatively low voltages (in the order of 12V), whereas the higher voltages for the lighting are limited to PCB 20. This allows for safe maintenance of the system, as the removable part can be removed and serviced, without exposure to the higher  
10 voltage levels.

Each lens 6a, 6b, 8a, 8b, 10a, 10b is a Fresnel lens as shown in figure 5. The Fresnel lens comprises a flange 24 for fixing of the lens in casing 4. The lenses show the annular segments 26 typical of Fresnel lenses. The  
15 lenses have four optical centres 28, 30, 32, 34, each defining a different optical axis. The focal length is the same for all lenses.

The effect of the lens having four optical centres will be described next with reference to figures 6-9.

20 The projection of the detection zone of lenses 10a, 10b and the corresponding PIR sensors is depicted in figure 6. The detection zone is divided into eight subzones, wherein each subzone comprises both a positive part (quadrilaterals with thin contours) and a negative part  
25 (quadrilaterals with thick contours). Four subzones 36a are due to lens 10a and four subzones 36b due to lens 10b. The upper two subzones A of subzones 36a are due to optical centres 28, 30 of lens 10a. The lower two subzones B of subzones 36a are due to optical centres 32, 34. Each subzone  
30 includes a negative and positive part. It is noted that the positive and negative part of the subzones are drawn spaced apart. In practice, the positive and negative parts usually adjoin each other.

The length  $d_1$  of the projection of the total detection zone is approximately 4 m, while the width  $d_2$  is approximately 3m. Therefore, the length of each subzone, comprising one positive part and one negative part, is approximately 1 m. The PIR sensor has a typical bandwidth of 0.2 - 2 Hz. Therefore, this detection zone will be able to detect within a speed range of 0.2 - 2 m/s or 0.72 - 7.2 km/h. This is the speed range typical for pedestrians.

Figure 7 shows the detection zone of lenses 8a, 8b and their corresponding PIR sensors. The layout is very similar to the layout shown in figure 6, due to the use of the same lens for all three sensor pairs. However, the size of the detection zone of figure 7 is larger due to the different tilting angle of the lens and sensor: the length  $d_3$  is 10m and the width  $d_4$  is 7.5 m. The length of each pair of negative and positive parts is 2.5 m. Therefore, the speed range detectable by the sensors corresponding to lenses 8a, 8b is 0.5 - 5 m/s or 1.8 km /h - 18 km /h. This is the typical speed range for bicycles.

Figure 8 shows the detection zone of lenses 6a, 6b. These lenses are orientated with their optical axes in more or less opposite directions. With respect to the detection zones of lenses 8a, 8b, 10a, 10b the lenses have been rotated about a vertical axis by an angle  $\alpha$  of approximately 50 degrees. Furthermore the tilt of the sensor and lens have been adjusted. This results in two clusters of subzones 40a, 40b which are provided at a distance from each other. Furthermore, the lens and PIR sensor have been rotated 90 degrees about a horizontal axis perpendicular to the detection surface of the sensor, with respect to the configuration described in figures 6 and 7. This ensures that the alternating positive and negative zones are still orientated in the desired direction with respect to the



road, i.e. a vehicle passing subzones 40a and/or 40b will pass a sequence of alternating positive and negative parts.

The width  $d_5$  of each of the detection zones is about 50 meters. Therefore, each pair of negative and positive part has a width of approximately 25 m. The detection zones of figure 8 are therefore arranged for the detection of objects having a speed in the range of 5 m/s – 50 m/s or 18 km/h – 180 km/h.

Note that due to the increased field of view of detectors 6a, 6b, the minimal temperature for an object to be detectable is higher than in the smaller detection zones of figures 6 and 7. This increases the ability of the system to distinguish between cars and pedestrians / cyclists.

Figure 9 shows an overview of all detection zones combined in one figure. Note that the pedestrian detection zone overlaps in space with the bicycle detection zone. The pedestrian detection zone is defined close to the pole 14, as this will be the usual place pedestrians are walking, e.g. on a sidewalk. Further note that the speed ranges of the pedestrian detection zone and bicycle detection zone overlap. In case both detectors detect an object, the system will output a signal corresponding to "bicycle", for safety reasons.

The detection by the system according to the invention of a car, bicycle and pedestrian will be described next with reference to figures 6-8.

Imagine that a pedestrian travels along the street at 5 km/h. The pedestrian will pass the detection zones 36a-b (figure 6). As the speed of the pedestrian falls within the speed range of these detection zones, the PIR sensor belonging to lens 10a, 10b will trigger. Furthermore, as the speed of the pedestrian also falls within the speed range of the bicycle detector (detection zones 38a-b), the PIR sensor

belonging to lens 8a, 8b will also trigger. On the basis of both detectors triggering, the system indicates that an object in the speed range 1.8 - 18 km/h has been detected. Alternatively, the system is configured to output a signal  
5 indicating the speed range 0.72 - 7.2 km/h when both detectors are triggered. Such an alternative configuration effectively redefines the speed ranges to 0.72 - 7.2 km/h and 7.2 - 18 km/h.

Next, a cyclist travels along the road at a speed  
10 of 16 km/h. The cyclist will be detected in the detection zones 38a-b of figure 7, as his speed falls within the speed range of 1.8 km/h - 18 km/h. The PIR sensor of detection zone 36 will not detect the cyclist, as it is too fast for the speed range of this detection zone. Neither will the  
15 detectors of detection zones 40a-b detect the cyclist, as the cyclist is too slow to be detected by these detectors.

A car passing at a speed of 40 km/h will not be detected by the PIR sensors of either of the detection zones 36 and 38, as its speed is above the upper limits of the  
20 speed ranges of the corresponding motion detectors. As its speed falls within the speed range of the motion detector comprising lenses 6a, 6b, it will be detected by this motion detector.

The present invention is by no means limited to  
25 the above described preferred embodiments thereof. The rights sought are defined by the following claims, within the scope of which many modifications can be envisaged.

## CLAUSES

1. Motion detector system for detecting moving vehicles and/or pedestrians and determining in which one of at least  
5 two speed ranges the speed of the detected vehicles and/or pedestrians falls, comprising:

- a first motion detector for detecting vehicles and/or pedestrians having a speed in a first speed range, the first detector being arranged to detect moving objects  
10 in a first detection zone having a first size, the first size determining the first speed range; and
- a second motion detector for detecting vehicles and/or pedestrians having a speed in a second speed range, the second detector being arranged to detect moving objects  
15 in a second detection zone having a second size, the second size determining the second speed range.

2. Motion detector system according to clause 1, wherein at least one of the detectors, preferably both detectors,  
20 comprises an infrared motion sensor.

3. Motion detector system according to clause 2, wherein at least one of the detectors comprises a lens or mirror arranged such that the respective detection zone is divided  
25 into at least two subzones.

4. Motion detector system according to clause 3, the lens or mirror being arranged to divide the respective detection zone into four subzones.

5. Motion detector system according to any of the clauses 1-4, the first and second motion detector each comprising an infrared motion sensor having at least two sensing elements in a reversed polarity configuration thereby dividing the  
5 respective detection zone into at least one negative part and at least one positive part, wherein the second motion detector is rotated with respect to the first motion detector

- about a substantially vertical axis to obtain a different  
10 location for the second detection zone than for the first detection zone; and

- about a second axis to at least partially compensate for rotation of the at least one negative part with respect to the at least one positive part of the second detection zone  
15 as compared to the first detection zone due to said rotation about the substantially vertical axis.

6. Motion detector system according to any of the clauses 1-5, comprising at least two motion detectors for detecting  
20 vehicles and/or pedestrians having a speed in substantially the same speed range, being arranged to detect moving objects in respective detection zones having substantially the same size, said same size determining said same speed range, wherein the detection zones of said at least two  
25 motion detectors are provided at a distance from each other.

7. Motion detector system according to clause 6, further comprising a processing component connected to said at least two motion detectors adapted to determine the direction of a  
30 detected object on the basis of the order of detection by said at least two motion detectors.

8. Motion detector according to any of the clauses 1-7, further comprising an output component for outputting a signal indicating either the first or the second speed range, the output component being configured to output a signal indicating one of the speed range comprising the lowest speed or the speed range comprising the highest speed when the first motion detector and the second motion detector both detect an object, preferably the speed range comprising the highest speed.

10

9. Motion detector system according to any of the clauses 1-8, further comprising an accelerometer, wherein the system is arranged to compensate output of the first and second detector for movement of the system detected by the accelerometer.

15

10. Lighting system comprising:

- the motion detector system of any of the clauses 1-9;
- at least one light source; and
- a controller which is actively connected to the motion detector system and to the at least one light source for controlling the at least one light source on the basis of the detection of a moving object by the motion detector system.

25

11. Lighting system according to clause 10, wherein the controller is arranged to control the at least one light source based on the speed range in which the detected object is classified.

30

12. Lighting system according to clause 10 or 11, further comprising a second motion detector system according to any of the clauses 1-9, being connected to the first motion detector system, wherein the first motion detector system  
5 comprises the controller, the controller being arranged to control the at least one light source based on the detection by both motion detector systems.

13. Lighting system according to any of the clauses 10-12,  
10 comprising a casing comprising a mounting part for mounting the casing to a lamppost and a detachable part which is detachably connected to the mounting part, the mounting part comprising an electronic circuit for connection to the light source and electrical connection means for disconnectably  
15 connecting to additional electronics, wherein the electronic circuit is configured such that the voltage over the connection means is below 50 V, preferably below 40 V, more preferably below 30 V.

14. Method for detecting moving vehicles and/or pedestrians and determining in which one of at least two speed ranges the speed of the detected vehicles and/or pedestrians falls, comprising:

- 5       – detecting vehicles and/or pedestrians having a speed in a first speed range, using a first motion detector being arranged to detect moving objects in a first detection zone having a first size, the first size determining the first speed range; and
- 10      – detecting vehicles and/or pedestrians having a speed in a second speed range, using a second motion detector being arranged to detect moving objects in a second detection zone having a second size, the second size determining the second speed range.

## CONCLUSIES

1. Bewegingdetectorsysteem voor het detecteren van bewegende voertuigen en/of voetgangers en het bepalen in welke van ten minste twee snelheidbereiken de snelheid van gedetecteerde voertuigen en/of voetgangers valt, omvattende:

- een eerste bewegingdetector voor het detecteren van voertuigen en/of voetgangers die een snelheid hebben binnen een eerste snelheidbereik, waarin de eerste detector is ingericht om bewegende objecten te detecteren in een eerste detectiezone met een eerste afmeting, waarin de eerste afmeting het eerste snelheidbereik bepaalt; en
- een tweede bewegingdetector voor het detecteren van voertuigen en/of voetgangers die een snelheid hebben binnen een tweede snelheidbereik, waarin de tweede detector is ingericht om bewegende objecten te detecteren in een tweede detectiezone met een tweede afmeting, waarin de tweede afmeting het tweede snelheidbereik bepaalt.

2. Bewegingdetectorsysteem volgens conclusie 1, waarin ten minste één van de detectoren, bij voorkeur beide detectoren, een infraroodbewegingsensor omvat.

3. Bewegingdetectorsysteem volgens conclusie 2, waarin ten minste één van de detectoren een lens of spiegel omvat die is ingericht zodanig dat de respectieve detectiezone is opgedeeld in ten minste twee subzones.



4. Bewegingdetectorsysteem volgens conclusie 3, waarin de lens of spiegel is ingericht om de respectieve detectiezone op te delen in vier subzones.

5 5. Bewegingdetectorsysteem volgens één van de conclusies 1-  
4, de eerste en tweede bewegingdetectoren elk omvattende een  
infraroodbewegingsensor met ten minste twee detectie-  
elementen in een tegengestelde polariteit configuratie  
waarmee de respectieve detectiezone in ten minste één  
10 negatief deel en ten minste één positief deel wordt  
opgedeeld, waarin de tweede bewegingdetector geroteerd is  
ten opzichte van de eerste bewegingdetector

- rond een eerste in hoofdzaak verticale as om een  
verschillende locatie te verkrijgen voor de tweede  
15 detectiezone dan voor de eerste detectiezone; en
- rond een tweede as om ten minste gedeeltelijk te  
compenseren voor rotatie van het ten minste ene  
negatieve deel ten opzichte van het ten minste ene  
positieve deel van de tweede detectiezone in  
20 vergelijking met de eerste detectiezone veroorzaakt  
door genoemde rotatie rond de in hoofdzaak verticale  
as.

6. Bewegingdetectorsysteem volgens één van de conclusies 1-  
25 5, omvattende ten minste twee bewegingdetectoren voor het  
detecteren van voertuigen en/of voetgangers die een snelheid  
hebben binnen in hoofdzaak hetzelfde snelheidbereik, welke  
zijn ingericht om bewegende objecten te detecteren in  
respectieve detectiezones met in hoofdzaak dezelfde  
30 afmeting, waarin de genoemde zelfde grootte het genoemde  
zelfde snelheidbereik bepaalt, waarin de detectiezones van  
de ten minste twee bewegingdetectoren zijn voorzien op een  
afstand van elkaar.

7. Bewegingdetectorsysteem volgens conclusie 6, verder  
omvattende een verwerkingcomponent verbonden met de ten  
minste twee bewegingdetectoren en aangepast om de richting  
van een gedetecteerd object te bepalen op basis van de  
5 volgorde van detectie door de ten minste twee  
bewegingdetectoren.

8. Bewegingdetectorsysteem volgens één van de conclusies 1-  
7, verder omvattende een uitvoercomponent voor het uitvoeren  
10 van een signaal dat ofwel het eerste ofwel het tweede  
snelheidbereik aangeeft, waarin de uitvoercomponent is  
ingesteld om een signaal uit te voeren dat indicatief is  
voor één van het snelheidbereik dat de laagste snelheid  
omvat en het snelheidbereik dat de hoogste snelheid omvat,  
15 bij voorkeur het snelheidbereik dat de hoogste snelheid  
omvat, wanneer de eerste bewegingdetector en de tweede  
bewegingdetector beide een object detecteren.

9. Bewegingdetectorsysteem volgens één van de conclusies 1-  
20 8, verder omvattende een accelerometer, waarin het systeem  
is ingericht om de uitvoer van de eerste en tweede detector  
te compenseren voor beweging van door de accelerometer  
gedetecteerde beweging van het systeem.

25 10. Verlichtingssysteem omvattende:

- het bewegingdetectorsysteem volgens één van de  
conclusies 1-9;
- ten minste één lichtbron; en
- een regelaar die werkzaam verbonden is met het  
30 bewegingdetectorsysteem en met ten minste één van de  
lichtbronnen voor het regelen van de ten minste ene  
lichtbron op basis van de detectie van een bewegend  
object door het bewegingdetectorsysteem.

11. Verlichtingsstelsel volgens conclusies 10, waarin de regelaar is ingericht om de ten minste ene lichtbron te regelen op basis van het snelheidsbereik waarin het gedetecteerde object geclassificeerd is.

5

12. Verlichtingsstelsel volgens conclusie 10 of 11, verder omvattende een tweede bewegingsdetectorsysteem volgens één van de conclusies 1-9, dat verbonden is met het eerste bewegingsdetectorsysteem, waarin het eerste

10 bewegingsdetectorsysteem de regelaar omvat die is ingericht om de ten minste ene lichtbron te regelen op basis van detectie door beide systemen.

13. Verlichtingsstelsel volgens één van de conclusies 1-12,

15 omvattende een behuizing die een monteerdeel omvat voor het monteren van de behuizing aan een lantaarnpaal en een losneembaar deel dat losneembaar verbonden is met het monteerdeel, waarin het monteerdeel een elektronisch circuit omvat voor verbinding met de lichtbron en elektrische  
20 verbindingmiddelen voor het verbreekbaar verbinden van additionele elektronica, waarin het elektronische circuit is ingericht zodanig dat het voltage over de verbindingmiddelen minder dan 50 V is, bij voorkeur minder dan 40V, met meer voorkeur minder dan 30V.

25

14. Werkwijze voor het detecteren van bewegende voertuigen en/of voetgangers en het bepalen in welke van ten minste twee snelheidbereiken de snelheid van de gedetecteerde voertuigen en/of voetgangers valt, omvattende:

- 5 - het detecteren van voertuigen en/of voetgangers die een snelheid hebben in een eerste snelheidbereik, gebruikmakende van een eerste bewegingdetector die is ingericht om bewegende objecten te detecteren in een eerste detectiezone met een eerste afmeting, waarin de eerste afmeting het  
10 eerste snelheidbereik bepaalt; en
- het detecteren van voertuigen en/of voetgangers die een snelheid hebben in een tweede snelheidbereik, gebruikmakende van een tweede bewegingdetector die is ingericht om bewegende objecten te detecteren in een tweede detectiezone  
15 met een tweede afmeting, waarin de tweede afmeting het tweede snelheidbereik bepaalt.

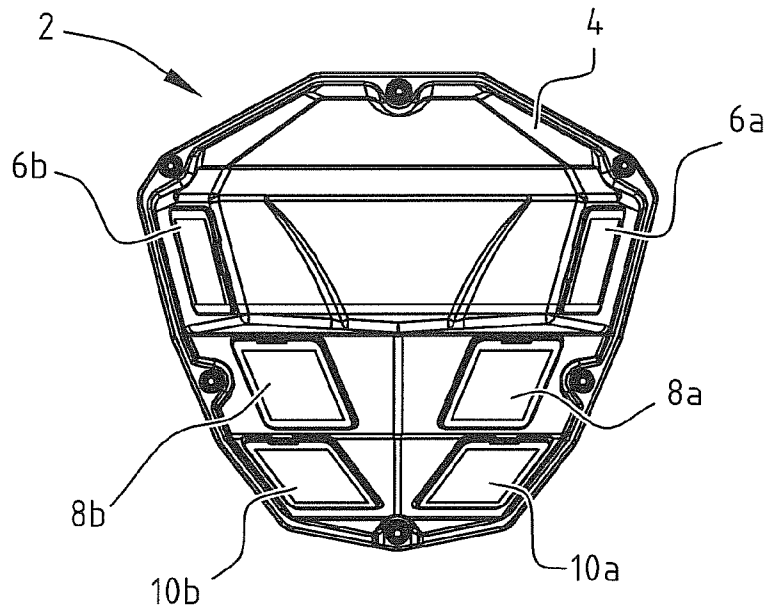


FIG. 1

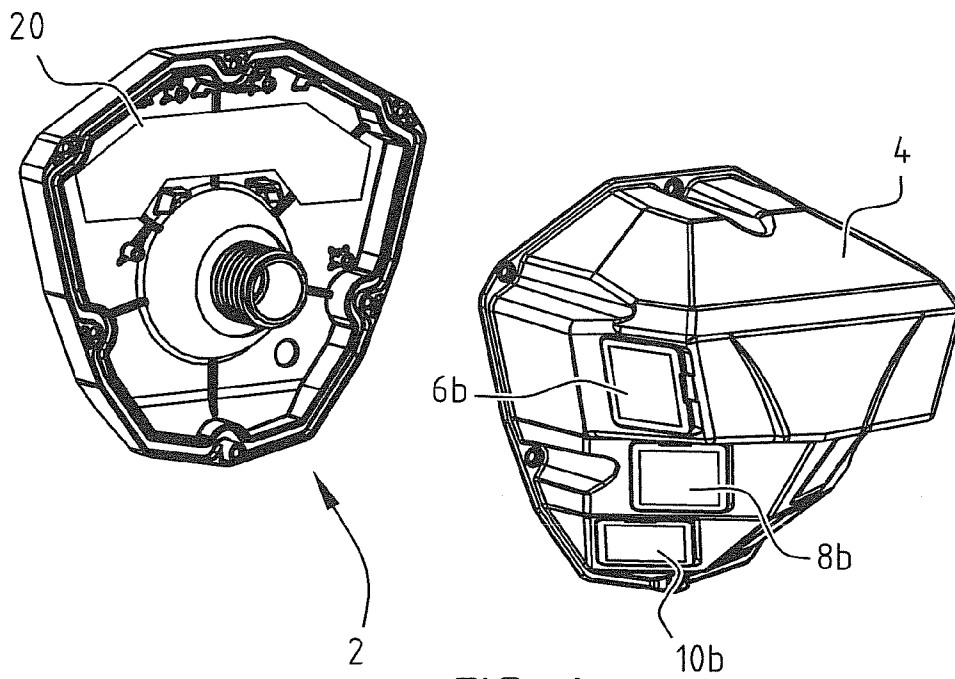


FIG. 4

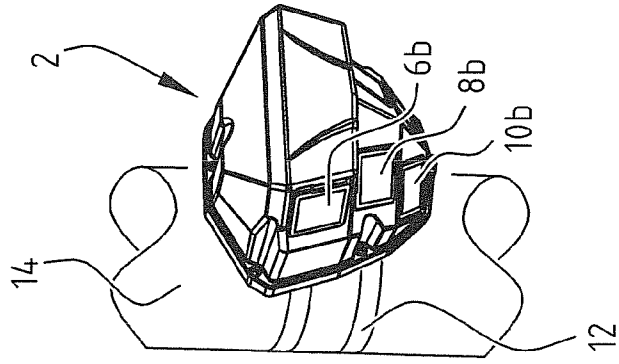


FIG. 2A

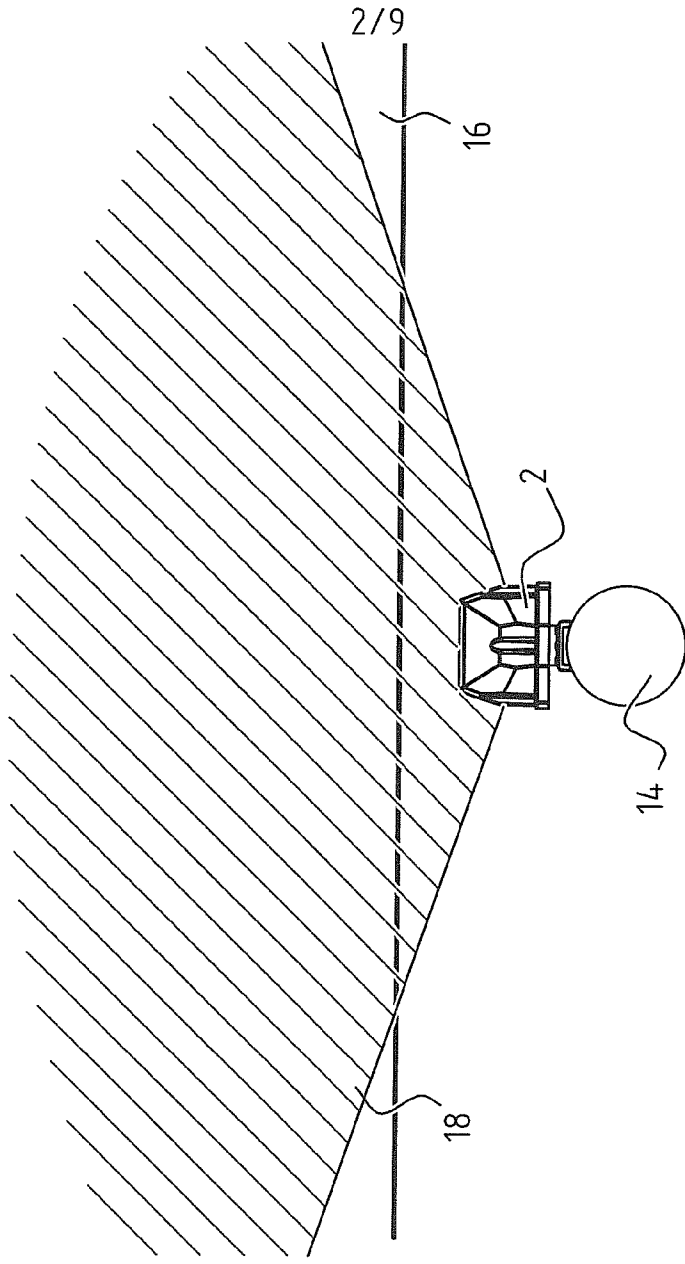
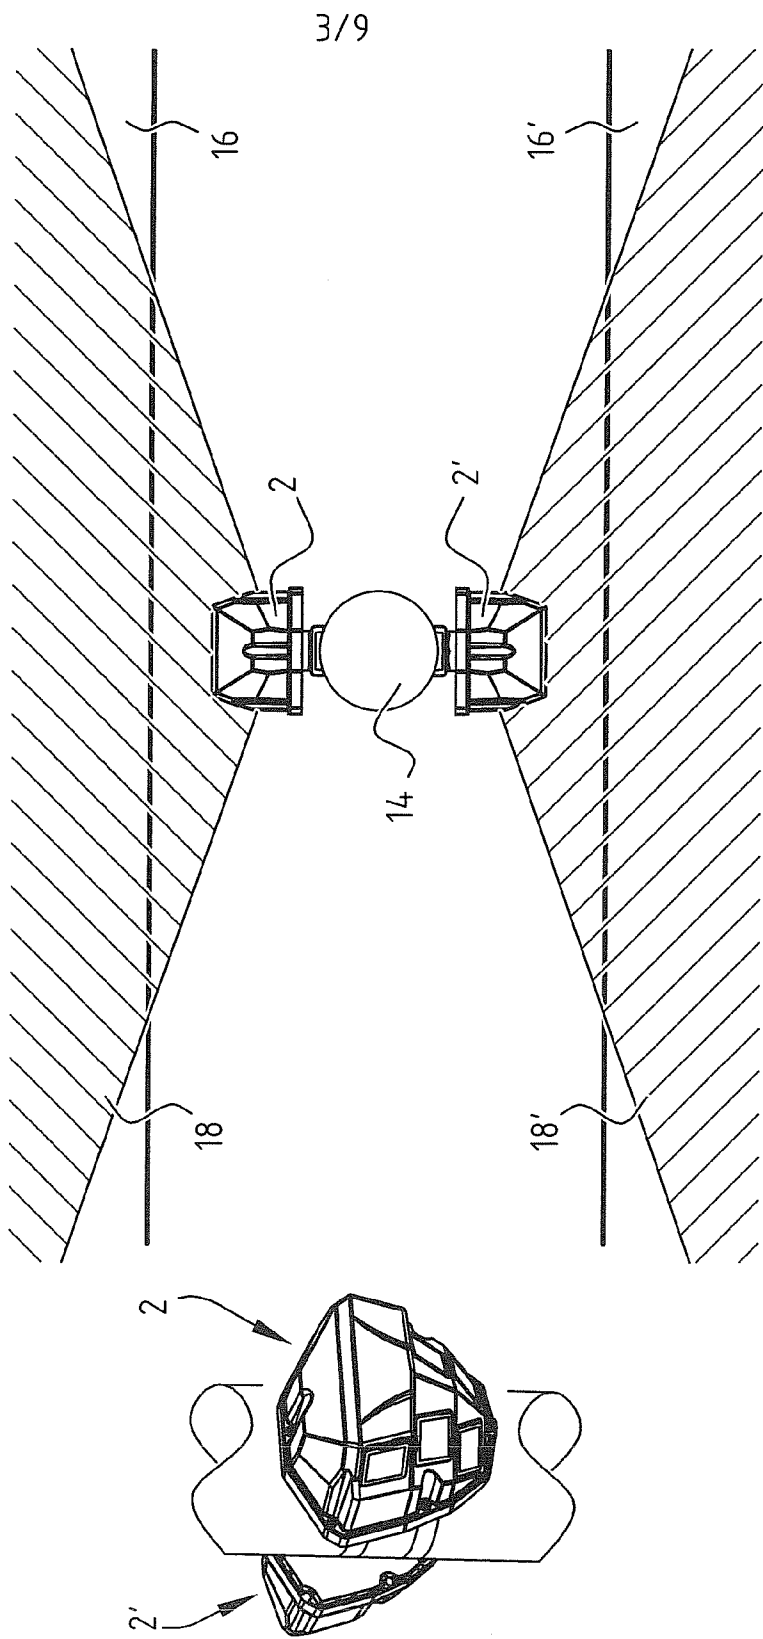


FIG. 2B



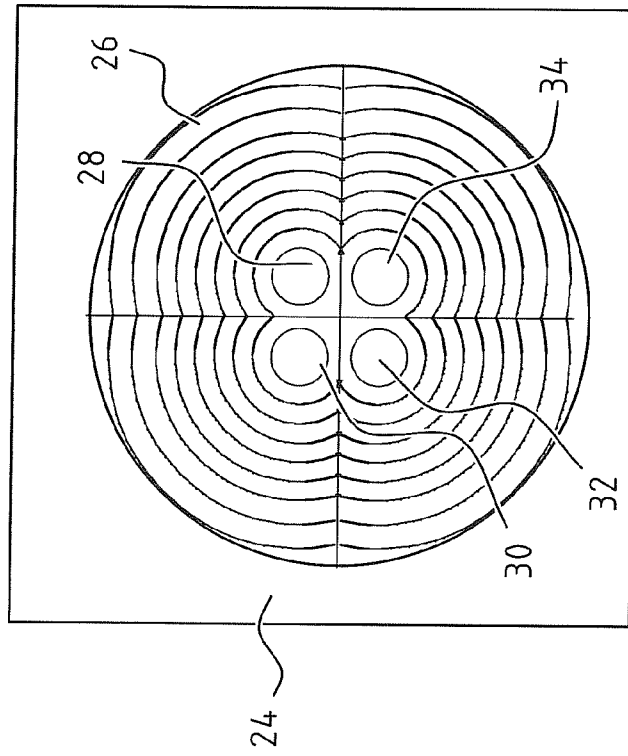


FIG. 5



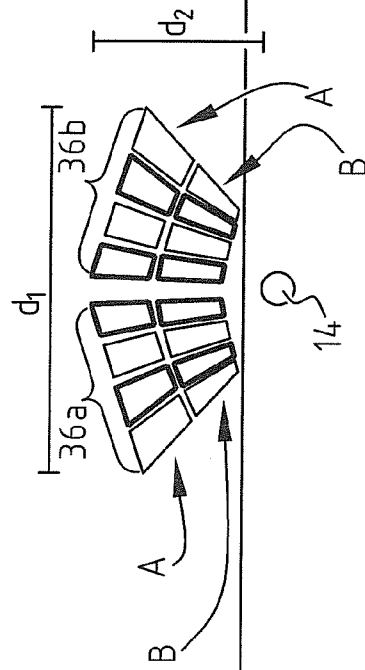


FIG. 6

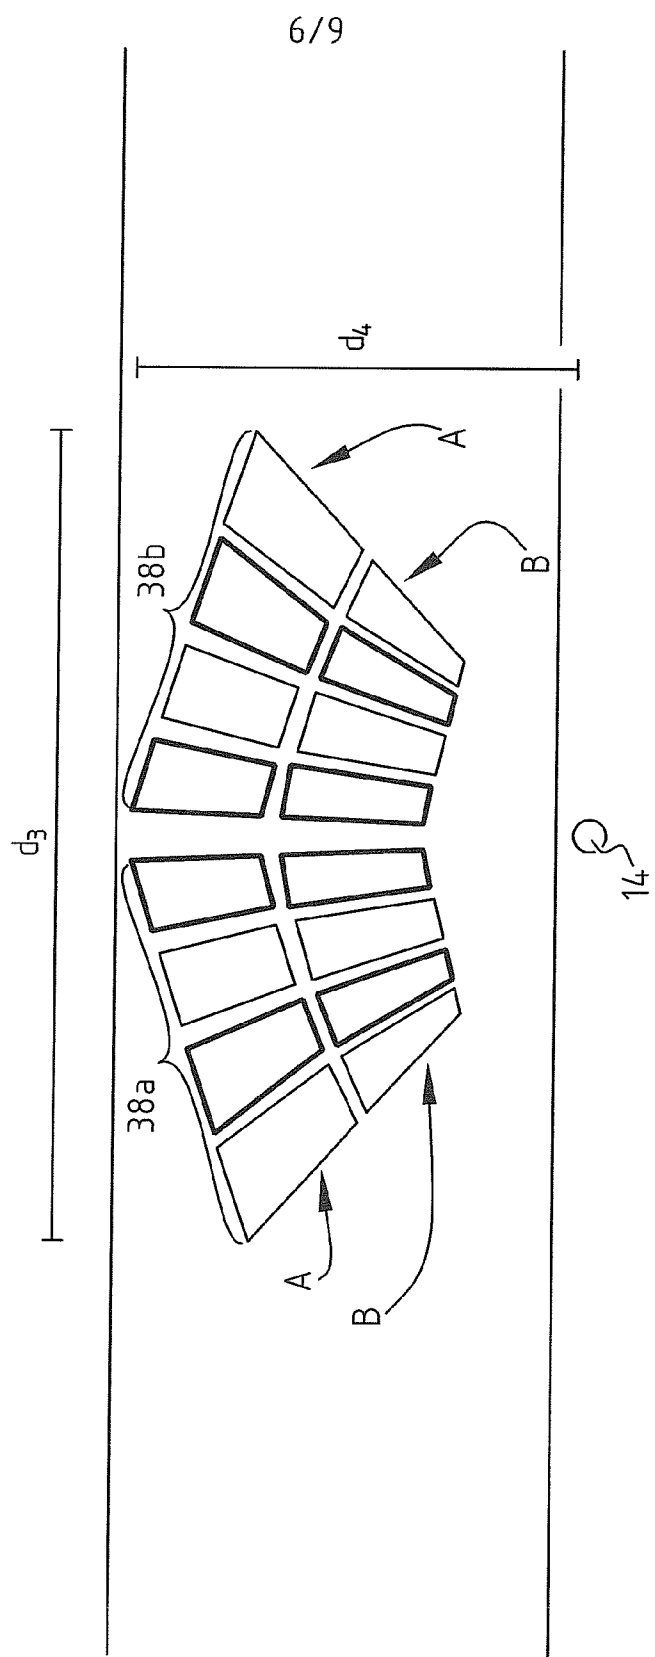


FIG. 7

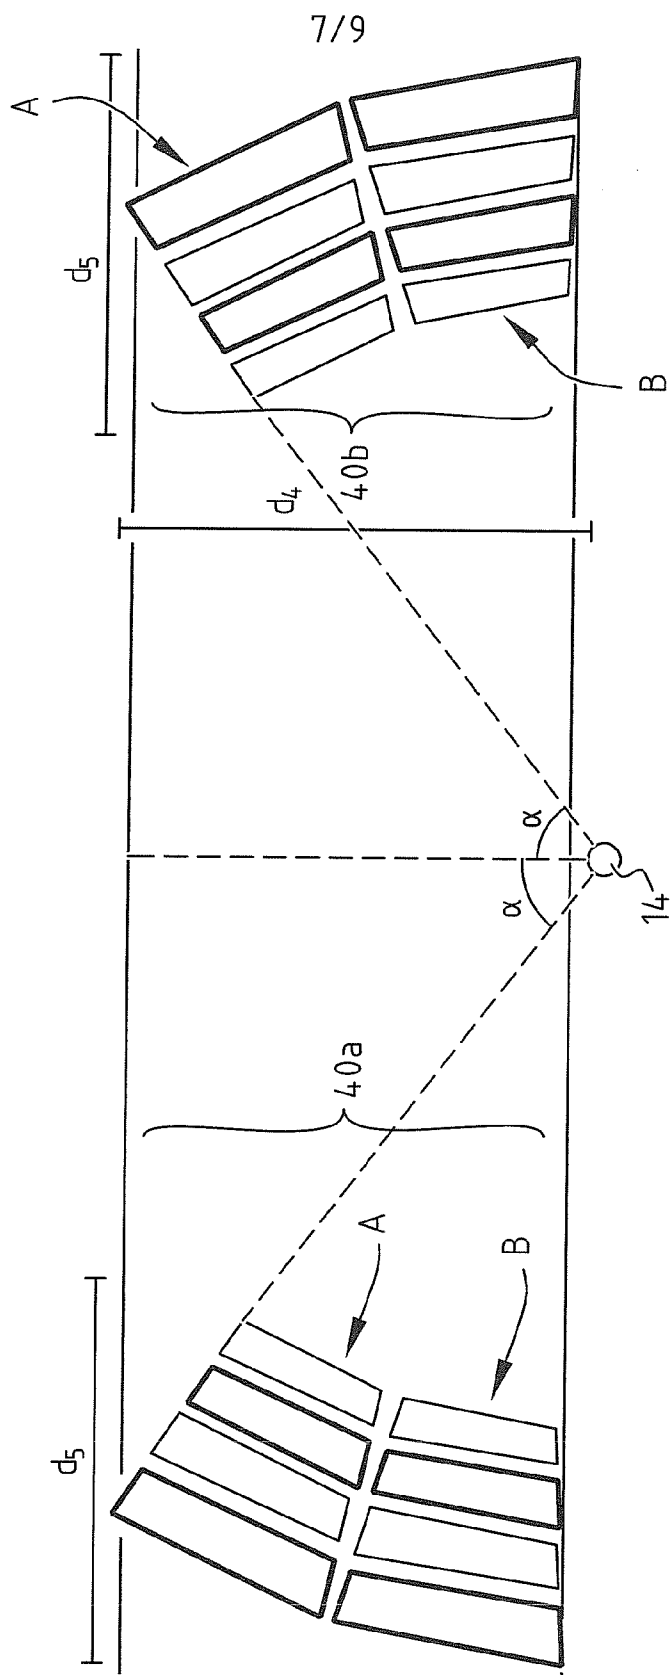


FIG. 8

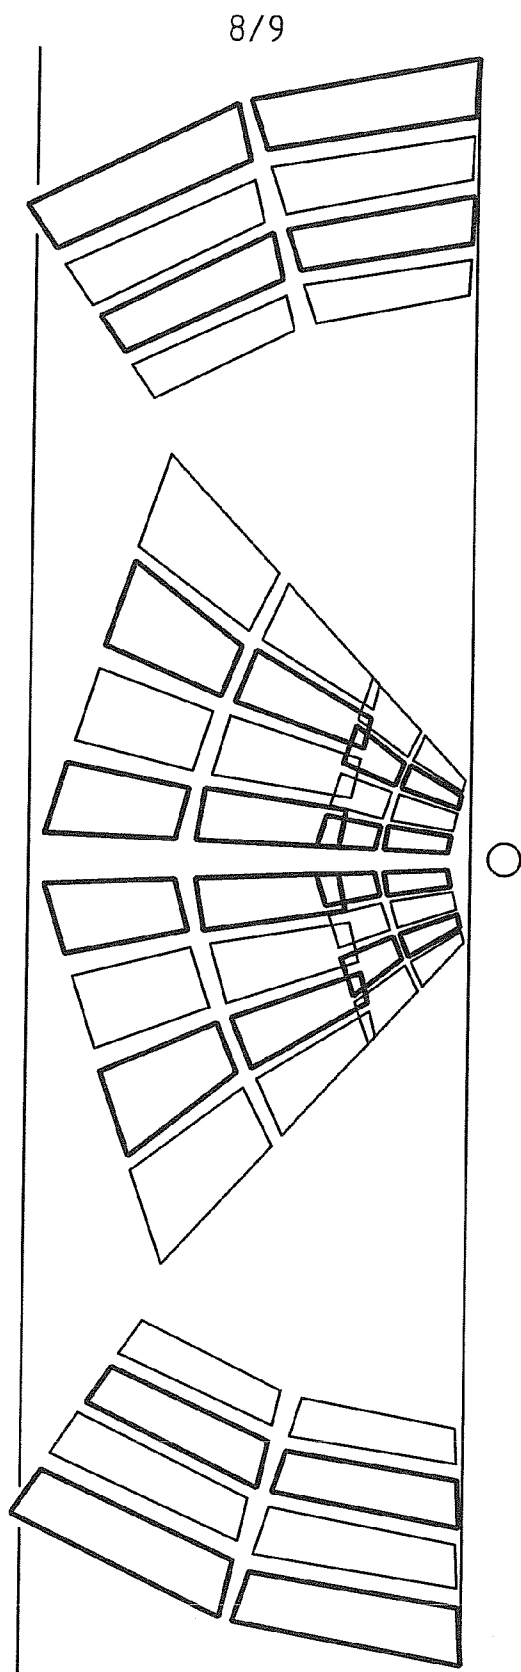


FIG. 9

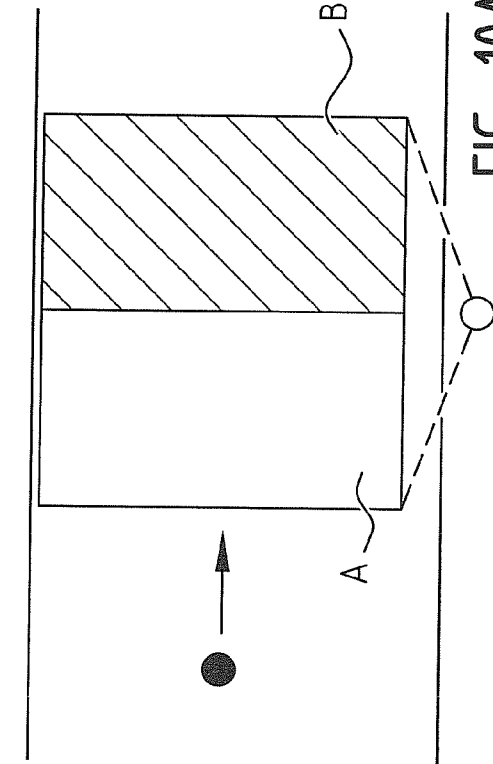


FIG. 10A

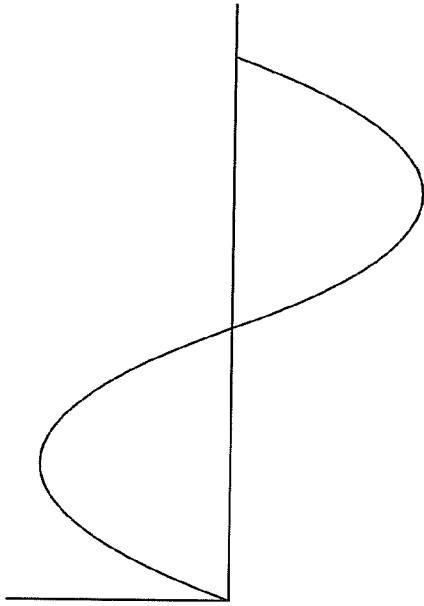


FIG. 10B

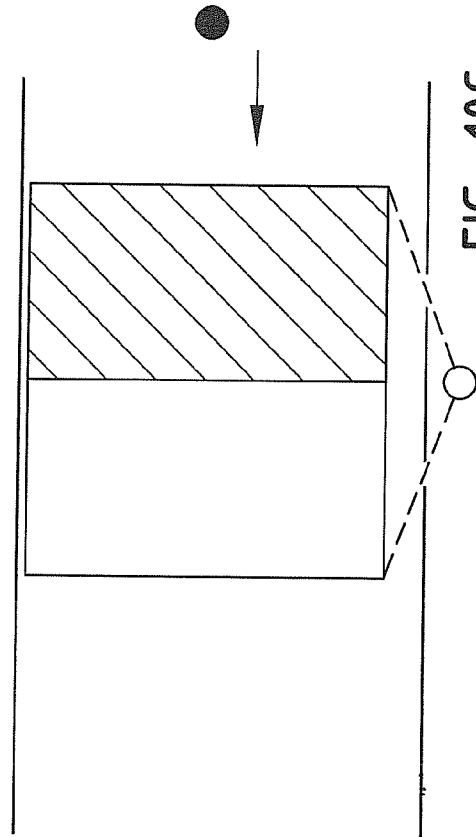


FIG. 10C

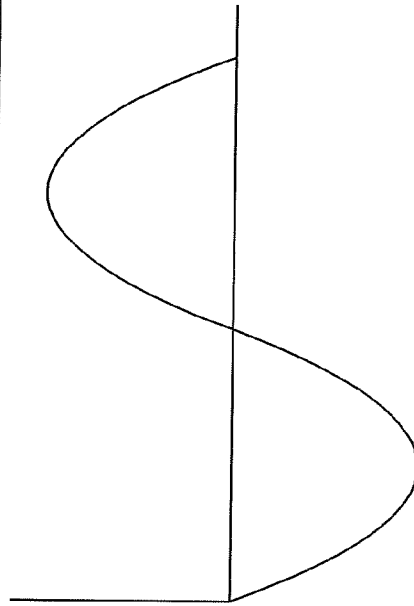


FIG. 10D

# SAMENWERKINGSVERDRAG (PCT)

## RAPPORT BETREFFENDE NIEUWHEIDSONDERZOEK VAN INTERNATIONAAL TYPE

IDENTIFICATIE VAN DE NATIONALE AANVRAGE	KENMERK VAN DE AANVRAGER OF VAN DE GEMACHTIGDE
	<b>4B/2NQ88/1</b>
Nederlands aanvraag nr.	Indieningsdatum
<b>2010323</b>	<b>18-02-2013</b>
	Ingeroepen voorrangsdatum
Aanvrager (Naam)	
<b>Tvilight B.V.</b>	
Datum van het verzoek voor een onderzoek van internationaal type	Door de Instantie voor Internationaal Onderzoek aan het verzoek voor een onderzoek van internationaal type toegekend nr.
<b>22-06-2013</b>	<b>SN 60270</b>
<b>I. CLASSIFICATIE VAN HET ONDERWERP</b> (bij toepassing van verschillende classificaties, alle classificatiesymbolen opgeven)	
Volgens de internationale classificatie (IPC)	
<b>H05B37/02                      F21S8/08                      G01V8/20</b>	
<b>II. ONDERZOCHE GEBIEDEN VAN DE TECHNIEK</b>	
Onderzochte minimumdocumentatie	
Classificatiesysteem	Classificatiesymbolen
<b>IPC8</b>	<b>H05B                      F21S                      G01V</b>
Onderzochte andere documentatie dan de minimum documentatie, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen	
III. <input type="checkbox"/>	<b>GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES</b> (opmerkingen op aanvullingsblad)
IV. <input type="checkbox"/>	<b>GEBREK AAN EENHEID VAN UITVINDING</b> (opmerkingen op aanvullingsblad)

**ONDERZOEKSRAPPORT BETREFFENDE HET  
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND  
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar  
de stand van de techniek

NL 2010323

**A. CLASSIFICATIE VAN HET ONDERWERP**

INV. H05B37/02 F21S8/08 G01V8/20  
ADD.

Volgens de Internationale Classificatie van octrooien (IPC) of zowel volgens de nationale classificatie als volgens de IPC.

**B. ONDERZOCHETE GEBIEDEN VAN DE TECHNIEK**

Onderzochte minimum documentatie (classificatie gevolgd door classificatiesymbolen)

H05B F21S G01V

Onderzochte andere documentatie dan de minimum documentatie, voor dergelijke documenten, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen

Tijdens het onderzoek geraadpleegde elektronische gegevensbestanden (naam van de gegevensbestanden en, waar uitvoerbaar, gebruikte trefwoorden)

EPO-Internal, WPI Data

**C. VAN BELANG GEACHTE DOCUMENTEN**

Categorie °	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
X	WO 2012/059842 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; VAN ZEIJL PAULUS THOMAS MARIA [NL] 10 mei 2012 (2012-05-10) * bladzijde 4, regel 29 - bladzijde 5, regel 9 * * bladzijde 12, regels 14-25 * * bladzijde 13, regels 1-9 * * figuur 1 *	1-14
X	GB 2 470 926 A (MCKINLEY ROBERT [GB]) 15 december 2010 (2010-12-15) * bladzijde 6, regel 32 - bladzijde 7, regel 25 * * figuren 1,2,4 *	1-14
A	DE 199 10 120 A1 (ABB PATENT GMBH [DE]) 14 september 2000 (2000-09-14) * samenvatting; figuur 6 *	3-5
	----- -/-	



Verdere documenten worden vermeld in het vervolg van vak C.



Leden van dezelfde octroofamilie zijn vermeld in een bijlage

**° Speciale categorieën van aangehaalde documenten**

"A" niet tot de categorie X of Y behorende literatuur die de stand van de techniek beschrijft

"D" in de octrooiaanvraag vermeld

"E" eerdere octrooi(aanvraag), gepubliceerd op of na de indieningsdatum, waarin dezelfde uitvinding wordt beschreven

"L" om andere redenen vermelde literatuur

"O" niet-schriftelijke stand van de techniek

"P" tussen de voorrangsdatum en de indieningsdatum gepubliceerde literatuur

"T" na de indieningsdatum of de voorrangsdatum gepubliceerde literatuur die niet bezwarend is voor de octrooiaanvraag, maar wordt vermeld ter verheldering van de theorie of het principe dat ten grondslag ligt aan de uitvinding

"X" de conclusie wordt als niet nieuw of niet inventief beschouwd ten opzichte van deze literatuur

"Y" de conclusie wordt als niet inventief beschouwd ten opzichte van de combinatie van deze literatuur met andere geciteerde literatuur van dezelfde categorie, waarbij de combinatie voor de vakman voor de hand liggend wordt geacht

"&" lid van dezelfde octroofamilie of overeenkomstige octrooipublicatie

Datum waarop het onderzoek naar de stand van de techniek van internationaal type werd voltooid

15 november 2013

Verzenddatum van het rapport van het onderzoek naar de stand van de techniek van internationaal type

Naam en adres van de instantie

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

De bevoegde ambtenaar

Sleightholme-Albanis

**ONDERZOEKSRAPPORT BETREFFENDE HET  
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND  
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar  
de stand van de techniek

NL 2010323

C.(Vervolg). VAN BELANG GEACHTE DOCUMENTEN		
Categorie °	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
A	EP 0 977 023 A1 (MATSUSHITA ELECTRIC IND CO LTD [JP]) 2 februari 2000 (2000-02-02) * samenvatting; figuur 1 *	3-5
A	WO 2009/098848 A1 (PANASONIC CORP [JP]; TATSUMU YOSHIKIMI; HAYASHI MASAMI; INOUE YUJI; NO) 13 augustus 2009 (2009-08-13) * samenvatting; figuur 5A *	1
A	GB 2 303 701 A (LG ELECTRONICS INC [KR]) 26 februari 1997 (1997-02-26) * samenvatting; figuur 10 *	1



**ONDERZOEKSRAPPORT BETREFFENDE HET  
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND  
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummer van het verzoek om een onderzoek naar  
de stand van de techniek

NL 2010323

In het rapport genoemd octrooigeschrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
WO 2012059842	A1	10-05-2012	CN 103181242 A 26-06-2013
			EP 2636283 A1 11-09-2013
			TW 201236508 A 01-09-2012
			US 2013229116 A1 05-09-2013
			WO 2012059842 A1 10-05-2012
-----			
GB 2470926	A	15-12-2010	GEEN
-----			
DE 19910120	A1	14-09-2000	DE 19910120 A1 14-09-2000
			EP 1037027 A2 20-09-2000
-----			
EP 0977023	A1	02-02-2000	CN 1255970 A 07-06-2000
			DE 69932897 T2 08-03-2007
			EP 0977023 A1 02-02-2000
			US 6403959 B1 11-06-2002
			WO 9941575 A1 19-08-1999
-----			
WO 2009098848	A1	13-08-2009	CN 101910739 A 08-12-2010
			WO 2009098848 A1 13-08-2009
-----			
GB 2303701	A	26-02-1997	CN 1146010 A 26-03-1997
			DE 19628050 A1 16-01-1997
			GB 2303701 A 26-02-1997
			IT RM960500 A1 12-01-1998
			JP 2909437 B2 23-06-1999
			JP H0981867 A 28-03-1997
			US 5844240 A 01-12-1998
-----			



OCTROOICENTRUM NEDERLAND

WRITTEN OPINION

File No. SN60270	Filing date (day/month/year) 18.02.2013	Priority date (day/month/year)	Application No. NL2010323
International Patent Classification (IPC) INV. H05B37/02 F21S8/08 G01V8/20			
Applicant Twilight B.V.			

This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☐ Box No. II Priority
- ☐ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☒ Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☒ Box No. VII Certain defects in the application
- ☐ Box No. VIII Certain observations on the application

	Examiner Sleightholme-Albanis
--	----------------------------------

## WRITTEN OPINION

Application number

NL2010323

---

### Box No. I Basis of this opinion

---

1. This opinion has been established on the basis of the latest set of claims filed before the start of the search.
2. With regard to any **nucleotide and/or amino acid sequence** disclosed in the application and necessary to the claimed invention, this opinion has been established on the basis of:
  - a. type of material:
    - ☐ a sequence listing
    - ☐ table(s) related to the sequence listing
  - b. format of material:
    - ☐ on paper
    - ☐ in electronic form
  - c. time of filing/furnishing:
    - ☐ contained in the application as filed.
    - ☐ filed together with the application in electronic form.
    - ☐ furnished subsequently for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

---

### Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

---

#### 1. Statement

Novelty	Yes: Claims	4, 5, 9, 13
	No: Claims	1-3, 6-8, 10-12, 14
Inventive step	Yes: Claims	
	No: Claims	1-14
Industrial applicability	Yes: Claims	1-14
	No: Claims	

#### 2. Citations and explanations

**see separate sheet**

## WRITTEN OPINION

Application number  
NL2010323

---

**Box No. VII Certain defects in the application**

---

**see separate sheet**

**Re Item V**

**Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

- 1 Reference is made to the following documents:
  - D1 WO 2012/059842 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; VAN ZEIJL PAULUS THOMAS MARIA [NL] 10 mei 2012 (2012-05-10)
  - D2 GB 2 470 926 A (MCKINLEY ROBERT [GB]) 15 december 2010 (2010-12-15)
- 2 The present application does not meet the criteria of patentability, because the subject-matter of claims 1 and 14 is not new.
- 3 Concerning claim 1, D1 discloses ((page 4, line 29 - page 5, line 9; page 12, lines 14-25; page 13, lines 1-9; figure 1):

Bewegingdetectorsysteem voor het detecteren van bewegende voertuigen (MV) en/of voetgangers (PD) en het bepalen in welke van ten minste twee snelheidbereiken (page 4, lines 30 and 32: 'fast' and 'slow') de snelheid van gedetecteerde voertuigen en/of voetgangers valt, omvattende:

  - een eerste bewegingdetector (RU1) voor het detecteren van voertuigen en/of voetgangers die een snelheid hebben binnen een eerste snelheidbereik ('fast'), waarin de eerste detector is ingericht om bewegende objecten te detecteren in een eerste detectiezone (FTL) met een eerste afmeting, waarin de eerste afmeting het eerste snelheidbereik bepaalt; en
  - een tweede bewegingdetector (RU3) voor het detecteren van voertuigen en/of voetgangers die een snelheid hebben binnen een tweede snelheidbereik ('slow'), waarin de tweede detector is ingericht om bewegende objecten te detecteren in een tweede detectiezone (STL) met een tweede afmeting, waarin de tweede afmeting het tweede snelheidbereik bepaalt.
- 4 The same reasoning applies, mutatis mutandis, to the subject-matter of the corresponding independent claim 14, which therefore is also considered not new.
- 5 Claims 1 and 14 also lack novelty in view of D2.

- 6        The dependent claim (2-13) do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of novelty and/or inventive step: please refer to the search report.

**Re Item VII**

**Certain defects in the application**

- 7        The features of the claims are not provided with reference signs placed in parentheses.